## **EUROPEAN PATENT OFFICE**

## Patent Abstracts of Japan

PUBLICATION NUMBER

62222081

**PUBLICATION DATE** 

30-09-87

APPLICATION DATE

25-03-86

APPLICATION NUMBER

61066166

APPLICANT: TOYO GIKEN KOGYO KK:

**INVENTOR:** 

USUDA HITOSHI:


INT.CL.

C23C 18/16 B65H 5/14 B66C 1/24

B66C 1/62 C25D 17/08 H05K 3/18

TITLE

JIG FOR THIN SHEET

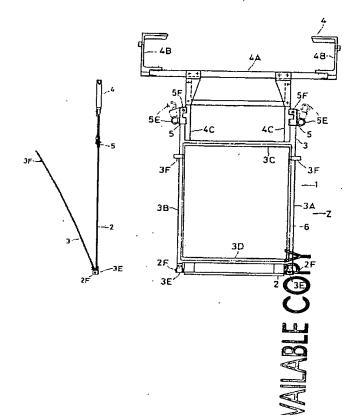

ABSTRACT:

PURPOSE: To permit simple fixing of thin sheets by a mechanical operation by mounting. an elastic opening/closing frame to a picture frame-shaped main frame in such a manifer that said opening/closing frame can be freely opened and closed by a rotating member and elastically grasping the thin sheet between the two frames by utilizing the elasticity of the opening/closing frame.

CONSTITUTION: Jigs 1 for thin sheets are fixed to a conveying frame 4 and are supplied by each piece to a thin sheet attaching and detaching machine by which the jigs are mechanically and flatly tiled. A tubular handle 5E is pulled to both sides by the machine and a stopper 5 is turned around a shaft 5F up to the position shown by a virtual line so that the opening/closing frame 3 is floated from the main frame 2 by the elastic force generated by it's own warpage. The handle 3F is then lifted upward from below by the machine to rotate the opening/closing frame 3 about 90° around the rotating part 2F, by which an inside layer sheet 6 for a printed wiring board is imposed on the main frame 2. The handle 3F of the opening/closing frame 3 is then detained by the machine and the opening/closing frame 3 is pressed onto the inside layer sheet 6 from above. The stopper 5 is rotated by the tubular handle 5E to fix the opening/closing frame 3 to the main frame 2. The part of the conveying frame 4 is raised and is ejected to the outside. The inside layer sheet 6 is thus mechanically and automatically attached and detached to and from the jig 1.

COPYRIGHT: (C)1987,JPO&Japio